
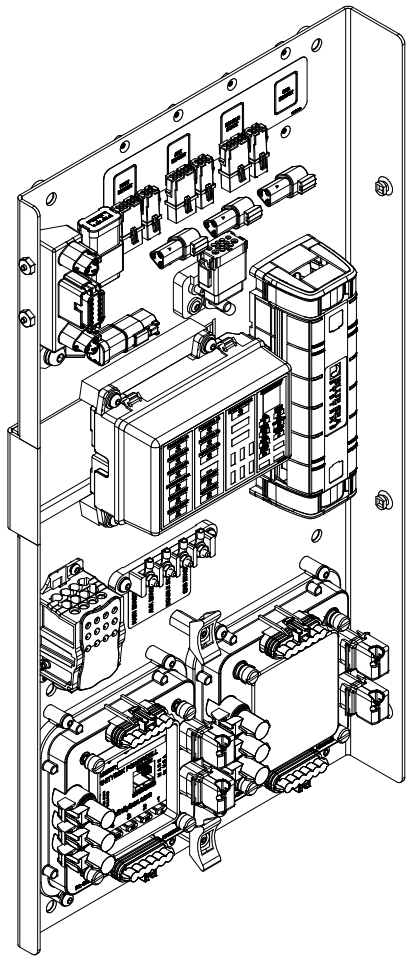
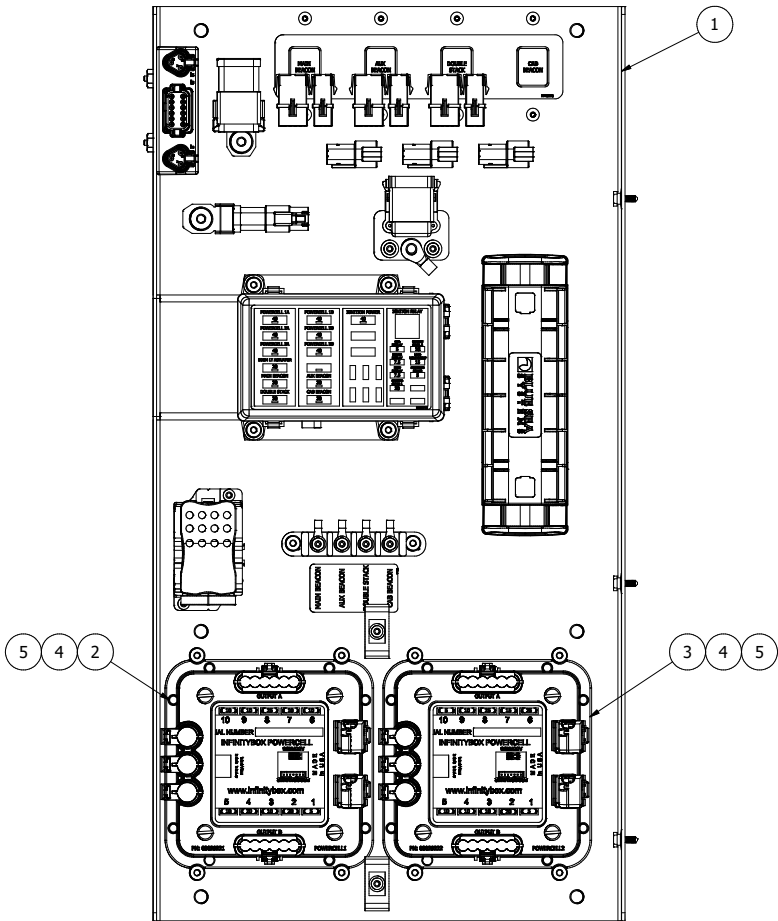
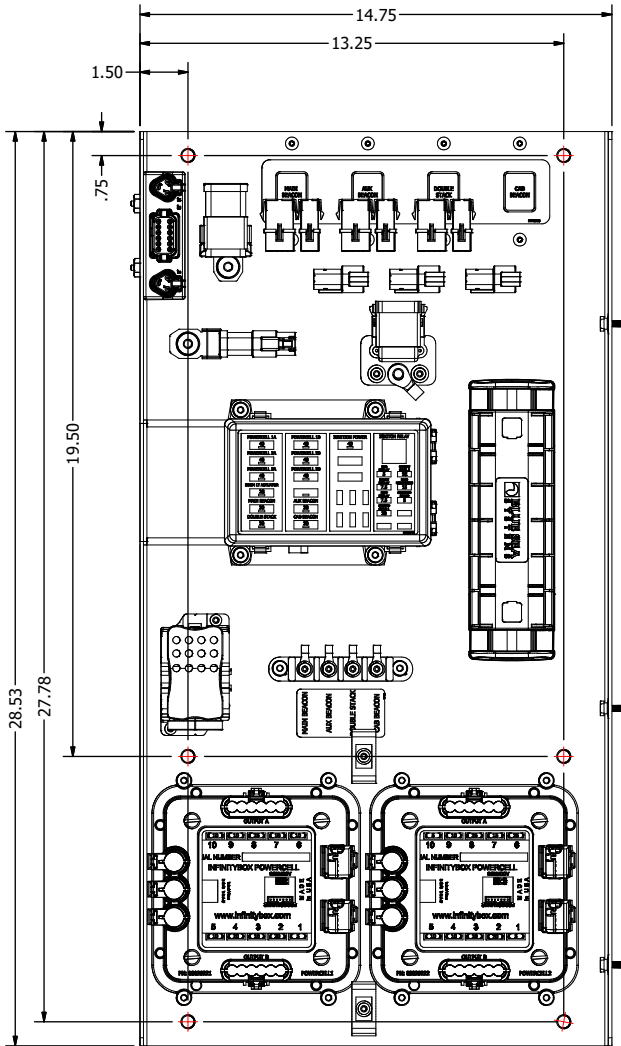


| SUPPORT DOCUMENTS | |
|-------------------|----------------|
| FILE | DESCRIPTION |
| 20079827 | TEST PROCEDURE |

| BILL OF MATERIAL | | | | | | |
|------------------|-------------|----------------------------|-----|--------------------------|---|-----|
| ITEM | PART NUMBER | STOCK NUMBER | REV | MANUFACTURER | DESCRIPTION | QTY |
| 1 | 20088746 | 20088746 | A | GS GLOBAL RESOURCES-1038 | ROTATOR LOAD DISTRIBUTION PANEL | 1 |
| 2 | 20088750 | 20088750 | A | GS GLOBAL RESOURCES-1038 | ROTATOR POWERCELL 1 | 1 |
| 3 | 20088751 | 20088751 | A | GS GLOBAL RESOURCES-1038 | ROTATOR POWERCELL 2 | 1 |
| 4 | 19126532 | BHCSHS1/4-20X1-1/4-SSBLKOX | | MISC-1040 | BUTTON HEAD CAP SCREW HEXAGON SOCKET 1/4-20X1-1/4-SSBLKOX | 8 |
| 5 | 19120119 | WASHL1/4-SS | | MISC-1040 | WASHER LOCK 1/4-SS | 8 |

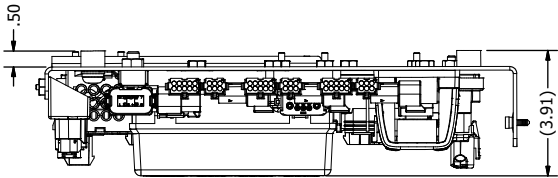

NOTE:
CONTACT ENGINEERING REGARDING ANY QUESTIONS,
CLARIFICATIONS, OR REQUESTED DEVIATIONS

| | | | | | | |
|----------------------|------------|------------|-------------|------------|-----|-----|
| CREATED DRAWING | DCOLLINS | 11-30-2022 | BDELAAT | 12-12-2022 | - | A |
| REVISION DESCRIPTION | REVISED BY | DATE | REVIEWED BY | DATE | ECO | REV |

RELEASED 12-12-2022

| | | | | | |
|--|--|-------------------------------|--|--|----------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | DESIGNED BY: DCOLLINS | DRAWING NUMBER 20088745 | | REV A |
| WIRE LENGTH TOLERANCES SPEC. - IPC/WHMA-A-620B | | PRODUCTION DATE: 11-3-2022 | PROJECT ENGINEER: BDELAAT | | |
| ≤ 1ft +1in -0in | | ACCOUNT MANAGER: MKAJA | DRAWING TITLE: ROTATOR LOAD DISTRIBUTION PANEL ASSEMBLY DRAWING | | |
| > 1ft-5ft +2in -0in | | PROJECT: - | SHEET SIZE: D | | |
| > 5ft-10ft +4in -0in | | CONTRACTOR: - | SCALE: 1:3 | | |
| > 10ft-25ft +6in -0in | | DATE: - | SHEET INFO: 1 OF 1 | | |
| > 25ft +5% -0% | | DATE: - | SHEET INFO: 1 OF 1 | | |
| FRACTIONS ± 1/16" ± 1.59mm | | DATE: - | SHEET INFO: 1 OF 1 | | |
| TOLERANCES ON DECIMALS: | | DATE: - | SHEET INFO: 1 OF 1 | | |
| 1 PLACE ± .030 | | DATE: - | SHEET INFO: 1 OF 1 | | |
| 2 PLACE ± .010 | | DATE: - | SHEET INFO: 1 OF 1 | | |
| 3 PLACE ± .005 | | DATE: - | SHEET INFO: 1 OF 1 | | |
| 4 PLACE ± .002 | | DATE: - | SHEET INFO: 1 OF 1 | | |
| 5 PLACE ± .001 | | DATE: - | SHEET INFO: 1 OF 1 | | |
| ANGULAR DIMENSIONS ± 1 DEG | | DATE: - | SHEET INFO: 1 OF 1 | | |
| DIMENSIONS IN () ARE REFERENCE | | DATE: - | SHEET INFO: 1 OF 1 | | |
| REMOVE BURRS | | DATE: - | SHEET INFO: 1 OF 1 | | |
| BREAK EDGES 0.01in 0.25mm Max | | DATE: - | SHEET INFO: 1 OF 1 | | |
| MAX SURFACE ROUGHNESS 125V | | DATE: - | SHEET INFO: 1 OF 1 | | |